


BODY OPENING AREAS (Side View: Rear)

(Three-Dimensional Distance)

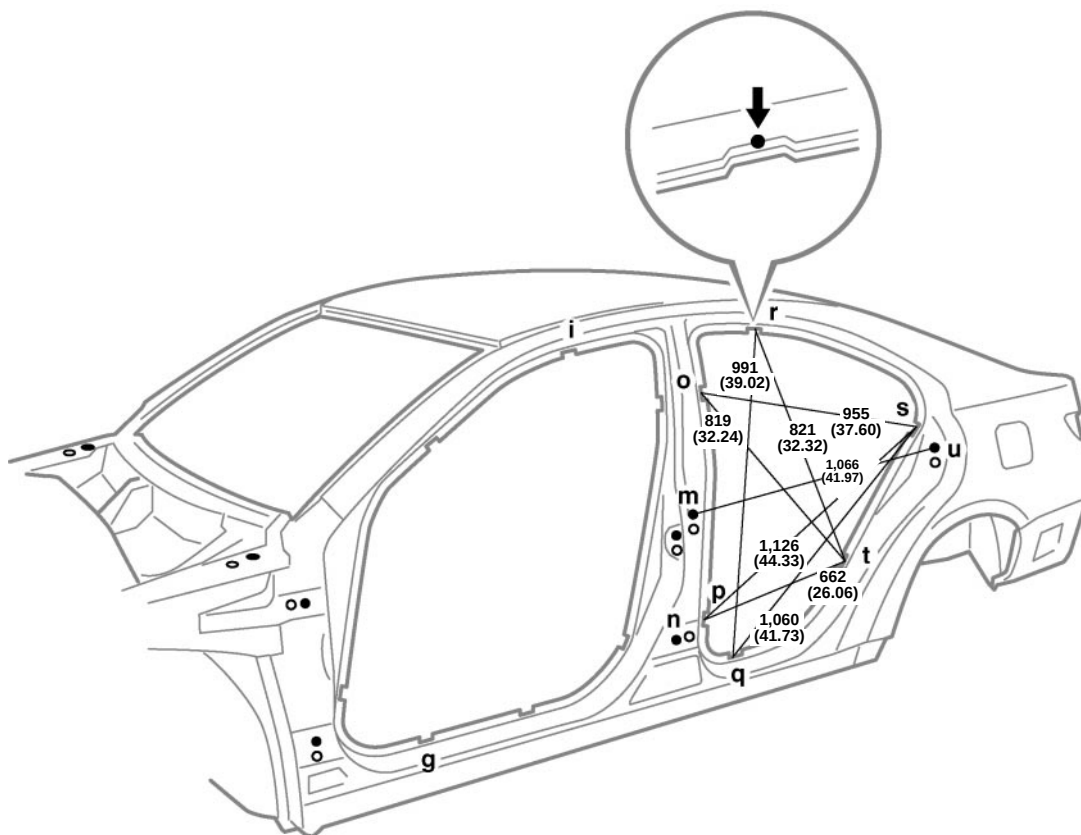

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t
1,397 (55.00)	1,491 (58.70)	1,491 (58.70)	1,191 (46.89)	1,418 (55.83)	1,494 (58.82)

G-q or g-Q	I-r or i-R	N-U or n-u	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,795 (70.67)	1,366 (53.78)	1,181 (46.50)	1,701 (66.97)	1,660 (65.35)	1,633 (64.29)	1,661 (65.39)	1,511 (59.49)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	P, p	Center body pillar assembly mark	—
G, g	Rocker panel assembly mark	—	Q, q	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	R, r	Roof side rail assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
N, n	Rear door hinge installation nut	M8 (0.31)	T, t	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)